


3" 202NTi

Compression Driver

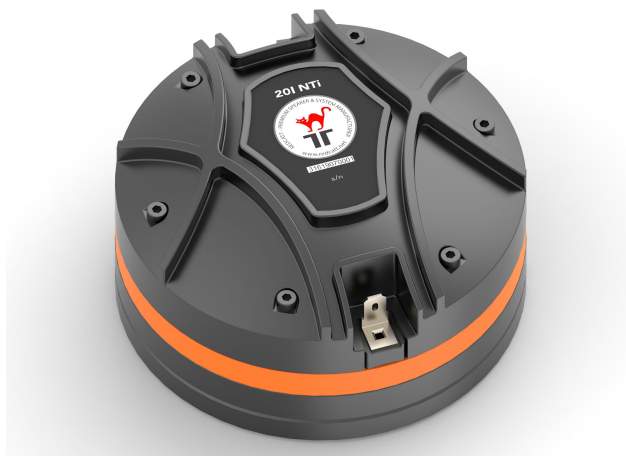

Key features:

- **VERY COMPACT DESIGN**
- **PURE TITANIUM DOME WITH SURROUND INTEGRATED RESONANCE CONTROL FEATURES**
- **PORTABLE PRODUCTS, 2-WAY AND MULTI-WAY SYSTEMS, LINE-ARRAY APPLICATIONS**

Design notes:

Introducing the 202NTi: Elevating sound performance to new heights! With cutting-edge technology and precision engineering, this compression driver takes your audio experience to the next level. Designed with a newly updated magnetic circuit, phase plug, voice coil, and dome, it outshines its predecessor, the 201NTi. No compromises

on sound quality - only pure, powerful sound in a compact package. The Neodymium magnetic circuit offers unrivaled control, paired with a 1.4-inch exit throat and titanium diaphragm for crystal-clear sound. Featuring a groundbreaking dome assembly design, the 202NTi boasts seamless integration of components for superior

frequency response and power handling. Each step of the assembly process is meticulously executed with state-of-the-art adhesives, ensuring unmatched reliability and performance. Redefine your audio experience with the 202NTi - where innovation meets excellence.

Specifications:

General specs	
Nominal Diameter:	3"
Rated Impedance:	8 ohm
Power handling	
AES Power:	100 watts
Program Power:	200 watts
Peak Power:	400 watts
Voice Coil	
Diameter:	76 mm
Winding wire:	CCAR
Former:	kapton
Winding height:	2.9 mm

T/S Parameters	
Resonant frequency:	700 Hz
Re:	5.9 ohm
Sensitivity:	109 dB


Design details	
Dome Material:	Titanium
Surround material:	Titanium
Magnet material:	Neodymium
Overall diameter:	112 mm
Bolt circle diameter:	102 mm
Mounting holes:	4
Depth:	58 mm
Net weight:	1.9 kg

Ordering code:

CD-3-009-8R-B2-C0001

In many cases REDCATT produces 4, 8 and 16 ohm versions — indicate what impedance you need in your request.

Frequency response & Impedance

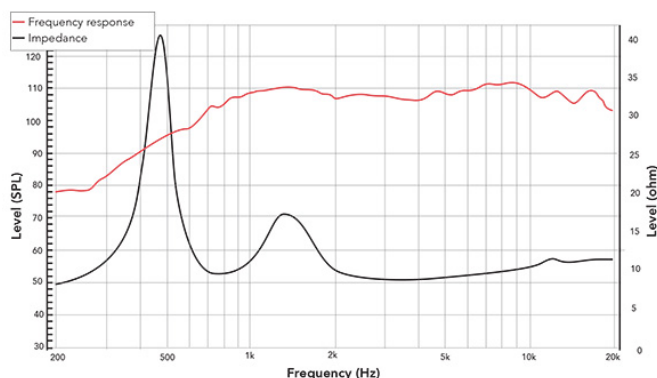

Frequency response measured on IEC baffle

2D drawing

